

Rua[®] Merlin




BOND BUILT ON TRUST

www.ruamerlin.com

RADIANT AR & RADIANT SBS




JASPER BROWN

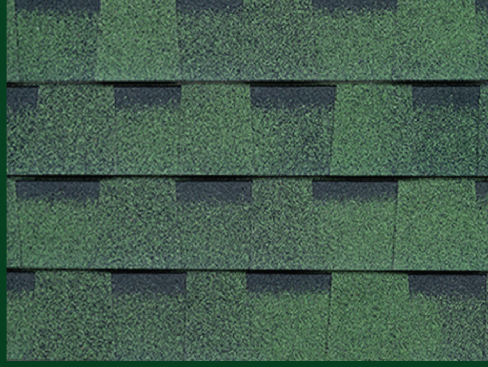

EMERALD GREEN




PEARL GRAY

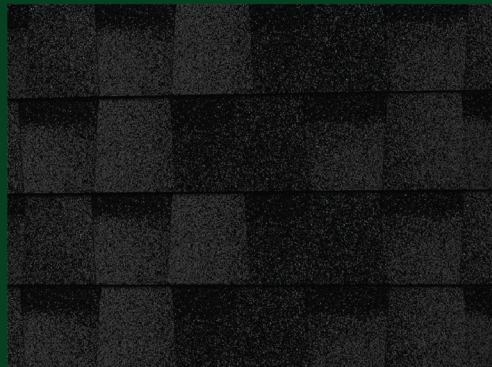


CARBON BLACK




RUBY RED

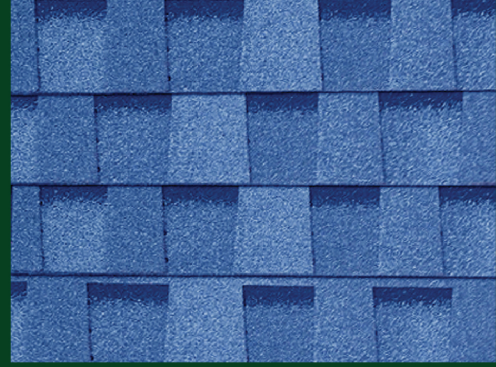

TANZANITE BLUE

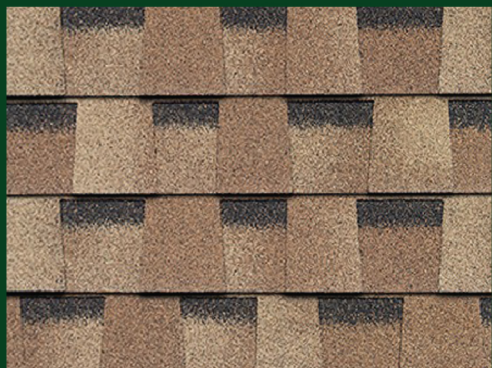


TOPAZ TAN

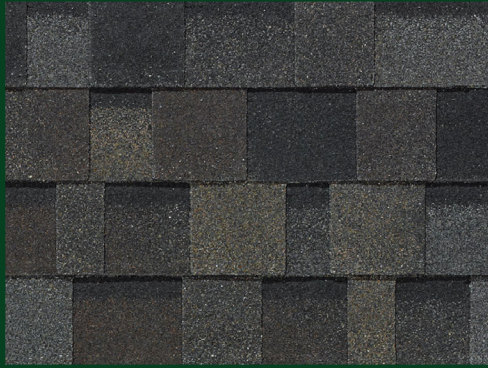

SAPPHIRE WOOD




AGATE GRAY

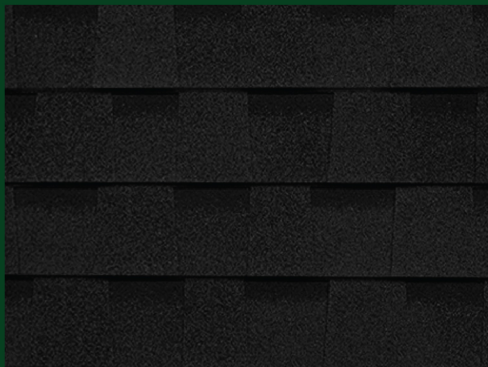


OBSIDIAN BLACK


DIAMOND AR

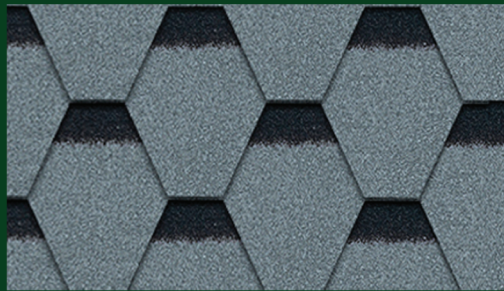

AGATE GRAY

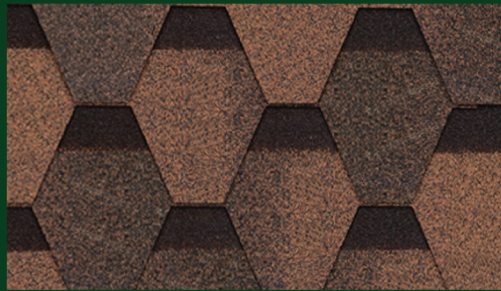


JASPER BROWN

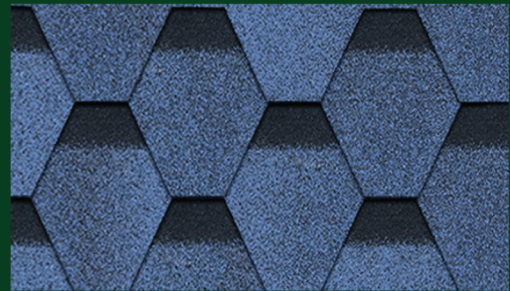


TANZANITE BLUE




TOPAZ TAN

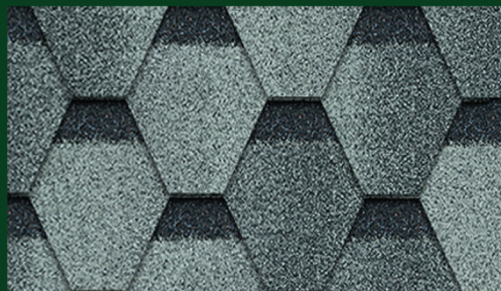

PEARL GRAY

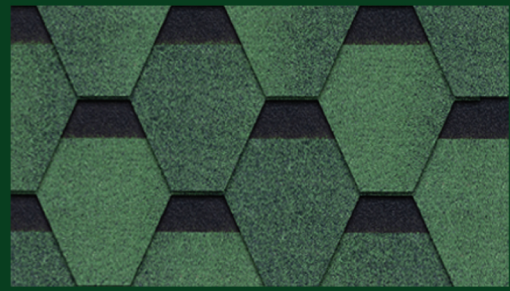


EMERALD GREEN

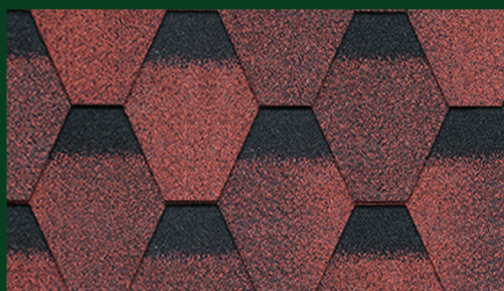

RUBY RED



OBSIDIAN BLACK

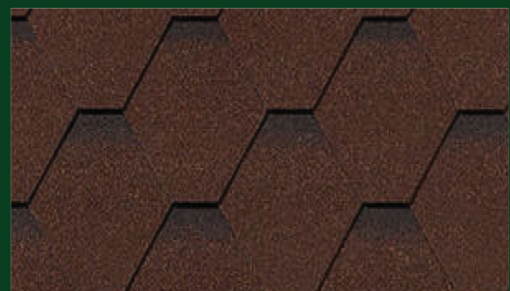


STONE BROWN

3TAB

Rua[®]
Merlin




RUBY RED

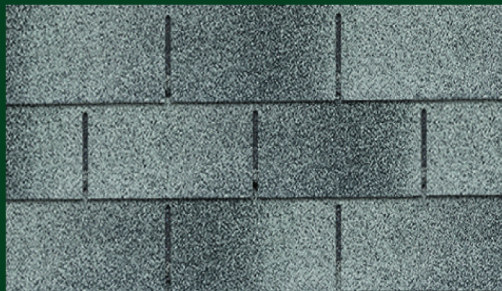

PEARL GRAY




JASPER BROWN

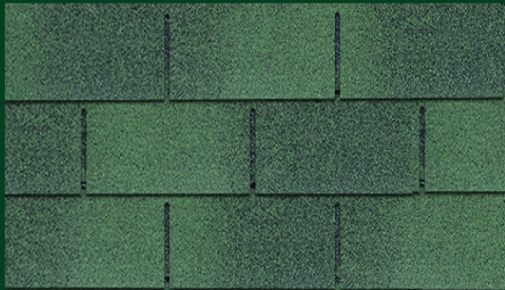

EMERALD GREEN



AGATE GRAY

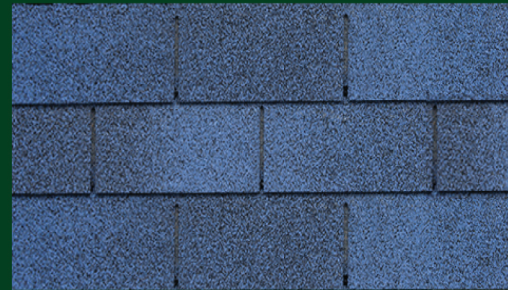

TANZANITE BLUE



OBSIDIAN BLACK





TOPAZ TAN



GRANITE BLACK

Architectural shingles offer the best results when installed with the recommended integrated RucMerlin roofing accessories showcased below.

For lasting protection against black streaks caused by algae, install RucMerlin **RADIANT SBS** algae resistance architectural shingles with 35 years warranty*

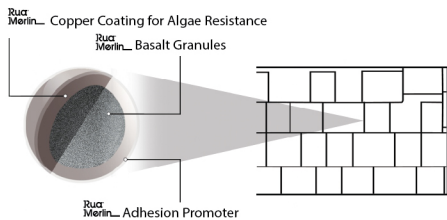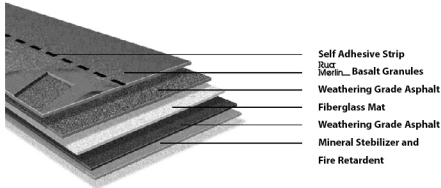

CHARACTERISTIC	UNITS	NORMAL VALUE	TEST METHOD	STANDARD LIMITS
EXPOSURE:	mm(in)	149(5 7/8)	-	-
TEAR STRENGTH:	g	PASS	ASTM D 1922	MIN: 1700
HEAT RESISTANCE:	-	PASS	-	90° C (192° F)
STABILIZED BITUMEN WEIGHT:	g/m ² (lbs/100ft ²)	PASS	ASTM D228	MIN: 2000(41)
GRANULE RETENTION:	%	PASS	ASTM D4977	MIN: 90
FIRE RATING:	-	CLASS A	ASTM E108	MIN: CLASS A
Length /pc:	mm(in)	1000(39.37)	-	-
Width /pc:	mm(in)	-	-	-
Quantity/Bundle:	pcs	-	-	-
Weight/Bundle:	kgs(lbs)	-	-	-
Coverage/Bundle:	m ²	-	-	-

Fiber glass asphalt shingles
 35 years limited warranty*
 Smart protection for 1st 10 years**
 Wind resistance 130mph
 Listed class A Fire UL 790
 Passes ASTM D7158, Class H
 ASTM D3161 Type 1, Class F
 ASTM D3018 Type 1,
 ASTM D3462 Type 1
 Dade Country approved



RucMerlin Underlayment is economical synthetic underlayment choice. Stronger than conventional felts, Underlayment installs easily, even in cool weather, due to its light weight. Underlayment is the perfect combination of strength and flexibility



RucMerlin Edge Starter is efficient use of material provides two strips from every shingle, easily separated along a factory - perforated line. RucMerlin high-strength thermally activated sealant is on every strip, helping ensure wind resistance at that critical first course of shingles.



RucMerlin Tap is Rubber reinforced self adhesive tap made to prevent leakage in between wall and roof area. RucMerlin Tap can also be used heavy duty leakage repairing in roof area.



RucMerlin Bitumen Membranes an affordable, modified bitumen roll roofing product that protects critical roof areas that are most susceptible to water infiltration caused by ice dams and wind-driven rain.



RucMerlin Ridges perforated traditional ridge shingle offerings are available in colors that pair with our most popular laminate shingles. Installation is super easy by simply bending and nailing in place



RucMerlin Shingles' Fasteners are high quality Galvanized Fastner specially made for RucMerlin Shingles. RucMerlin Galvanized Fastners are long durable and rust free

*Conditions mentioned in the warranty terms **Conditions mentioned in the warranty terms
 To find out more about RucMerlin Architectural shingles or additional products, please talk to an RucMerlin sales representative or a professional roofing contractor, or contact RucMerlin directly.
 The information in this literature is subject to change without notice. We assume no responsibility for errors that may appear in this literature
 This Brouchure is made only for the distribution in Asia & Middle East,